

Acceleration-Duration Eyes Up

Note: comparing data against the base case


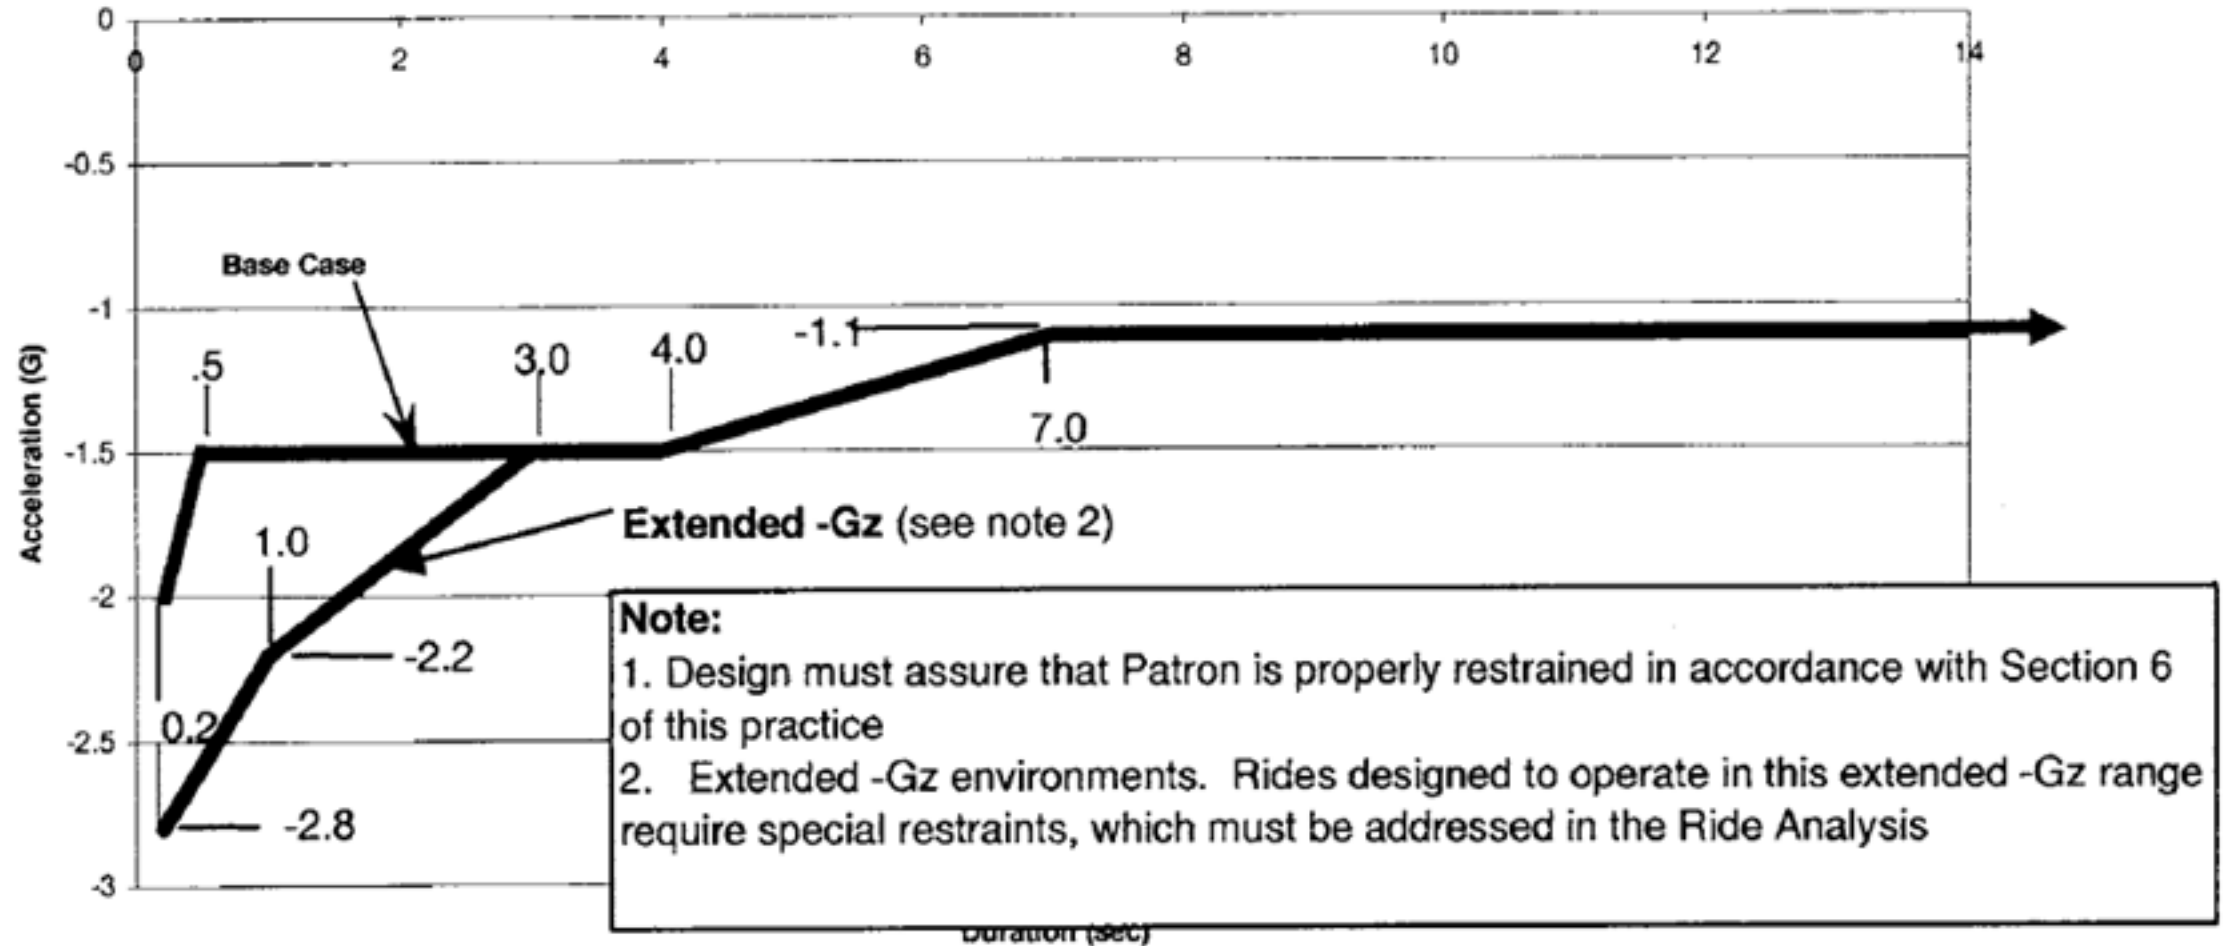


FIG. 9 Acceleration-Duration Limits for -Gz (Eyes Up)

Process (suggested)


1. Filter data to 5Hz
2. If maximum acceleration is less than the 40 second exposure limit acceleration, data passes.
3. If not, select an acceleration value
4. Locate all places on the filtered acceleration time-history where this acceleration value is exceeded.
5. For each one of these events, calculate the duration at this acceleration value. Note that this may require interpolation between the sampled data points, depending upon the sample rate.
6. Compare the acceleration-duration point with the allowable limit curve

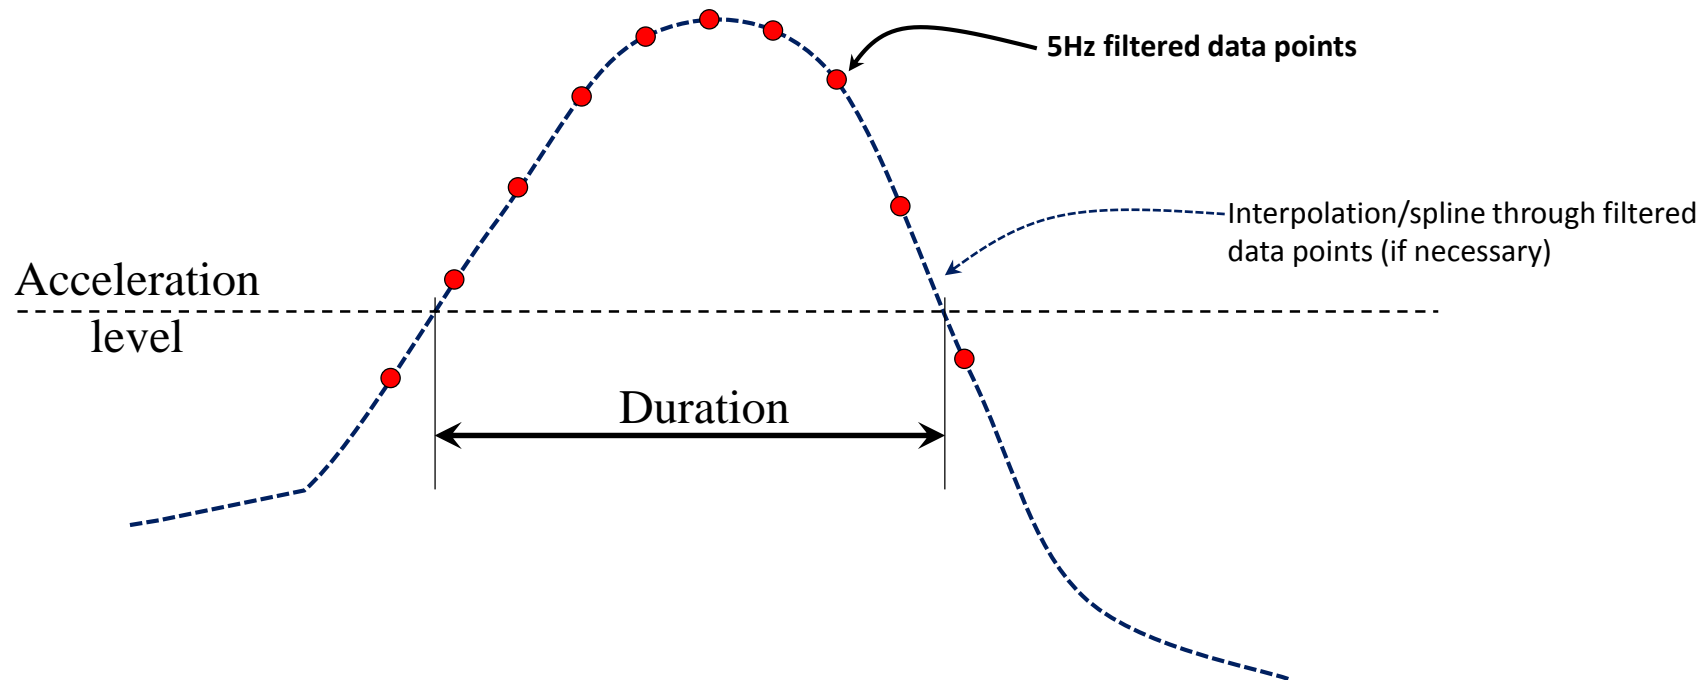

Acceleration-Duration Eyes Up


ASTM_AccelDuration_Up_justPasses

Data filtered using a 5.0Hz Butterworth Lowpass 4-pole filter, specifically the Matlab "filter" function

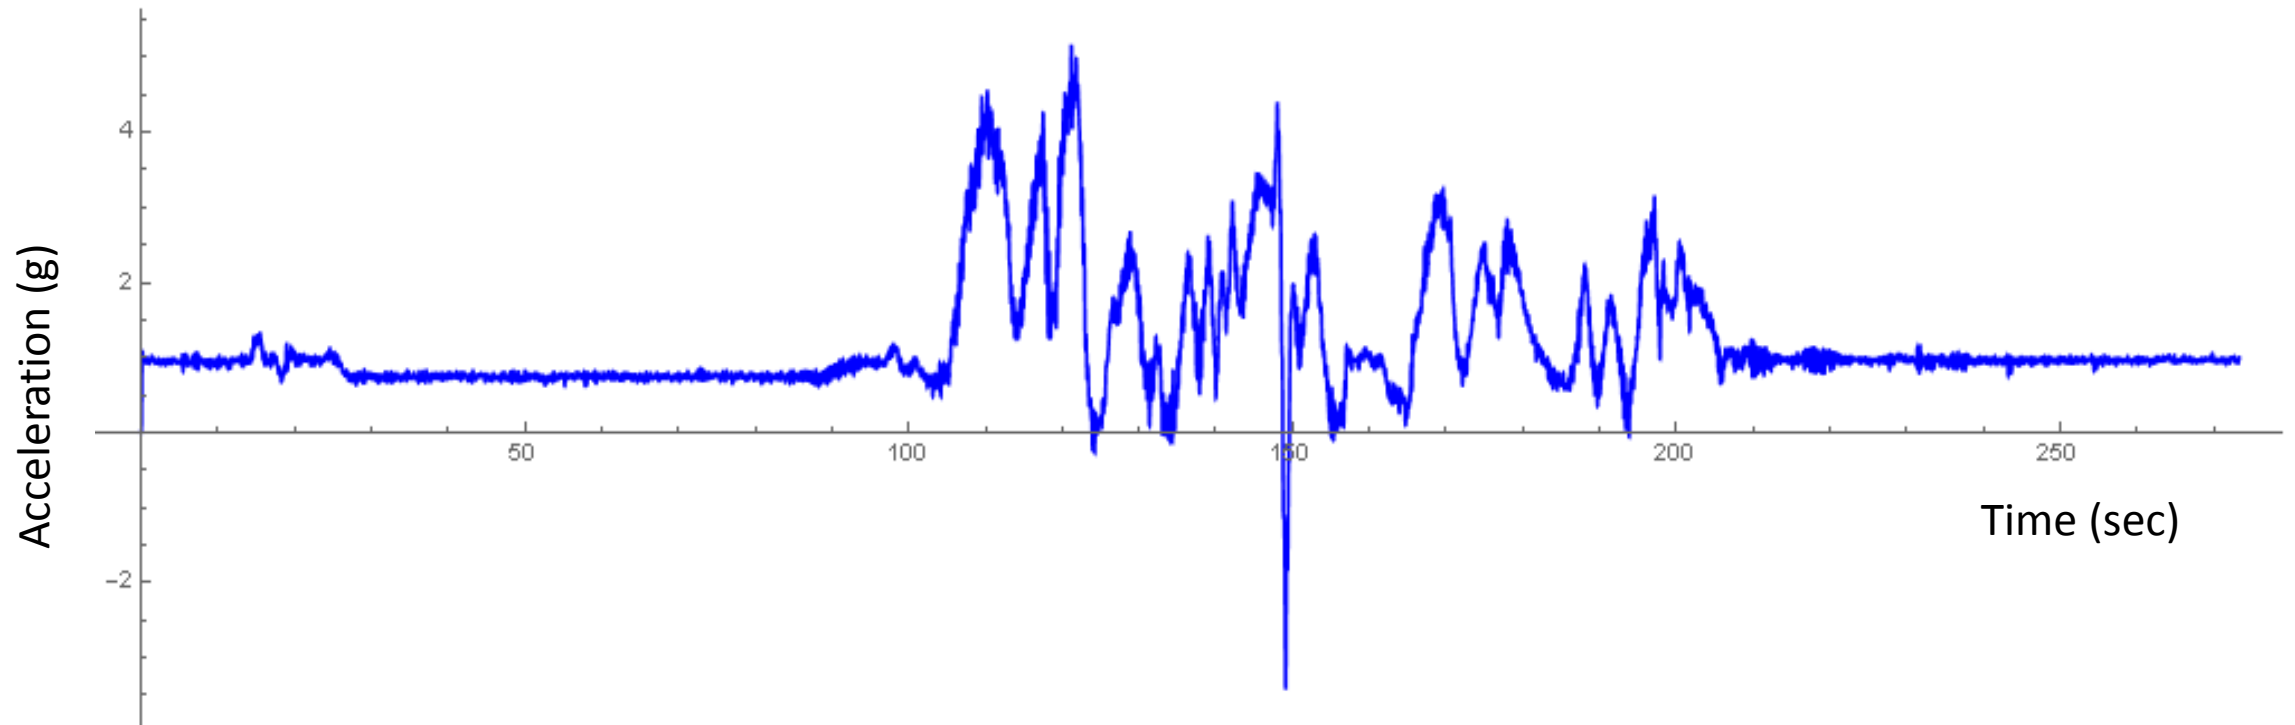

Acceleration-Duration Eyes Up


ASTM_AccelDuration_Up_justPasses

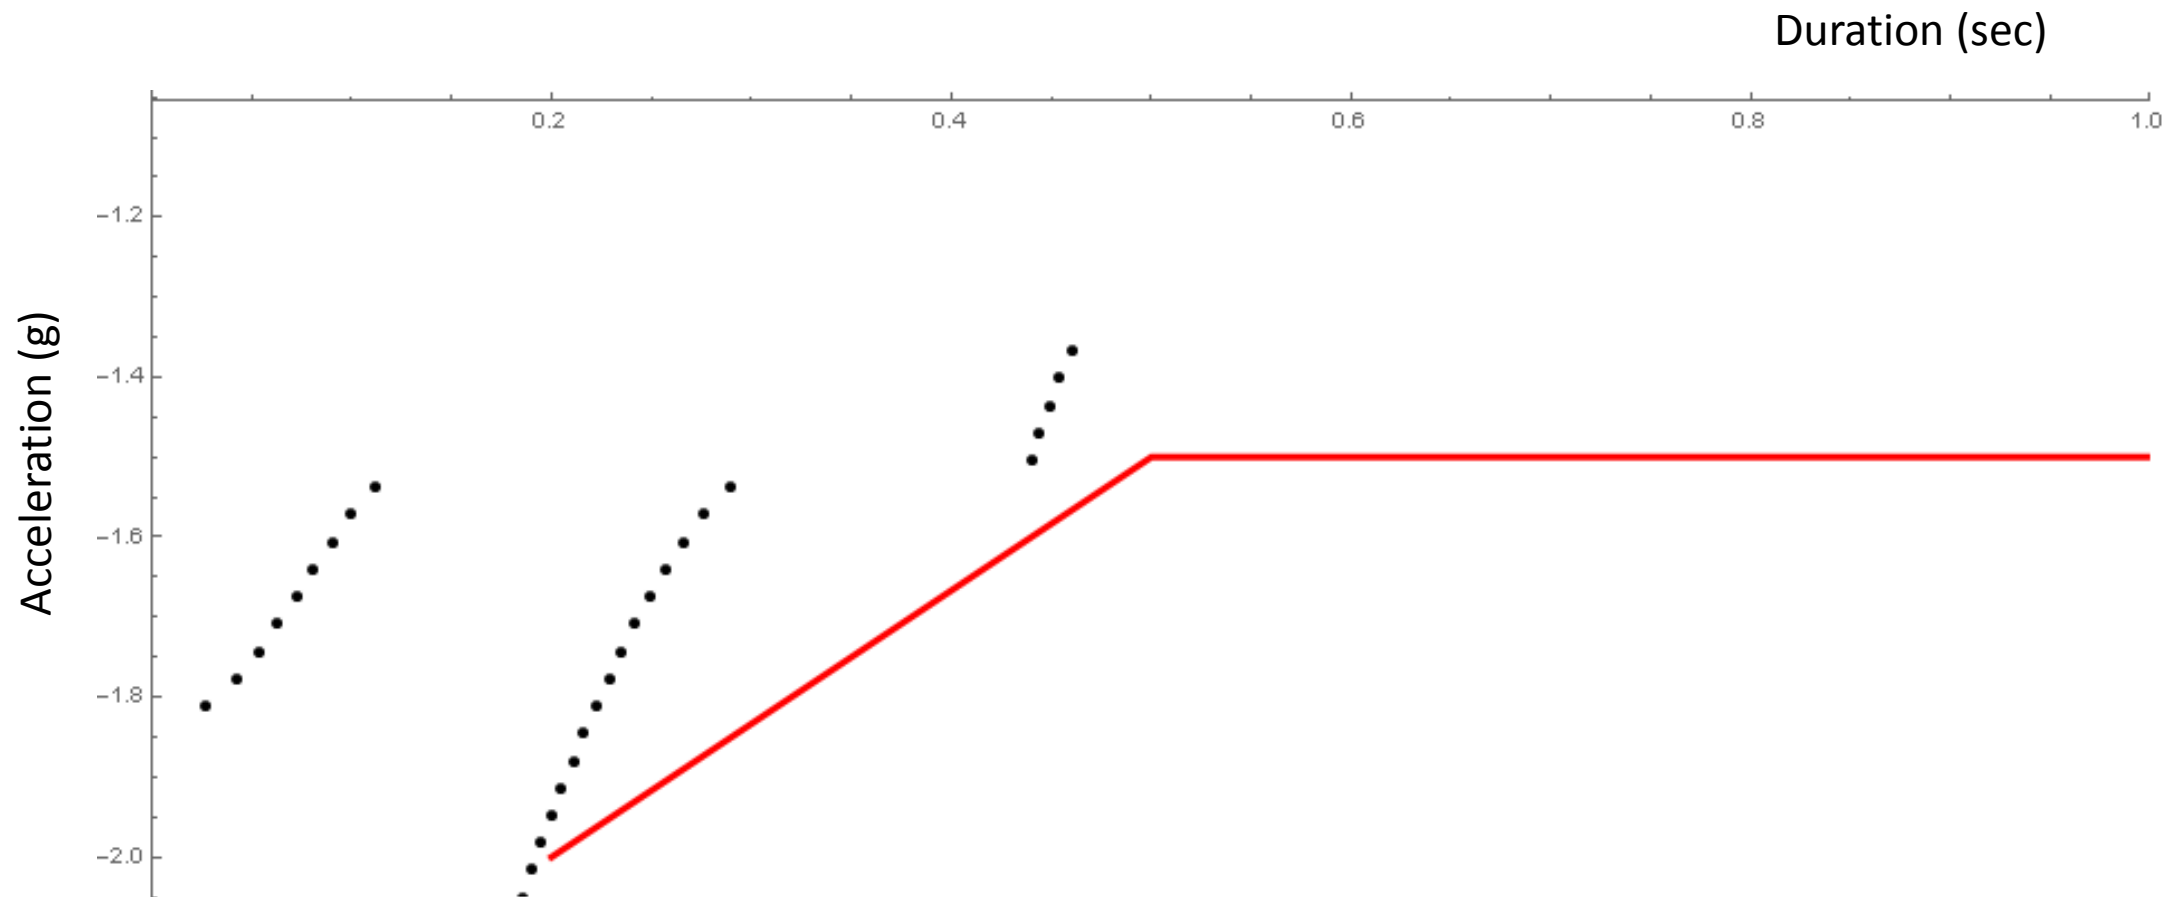



Acceleration-Duration Eyes Up

ASTM_AccelDuration_Up_justFails

Data filtered using a 5.0Hz Butterworth Lowpass 4-pole filter, specifically the Matlab "filter" function

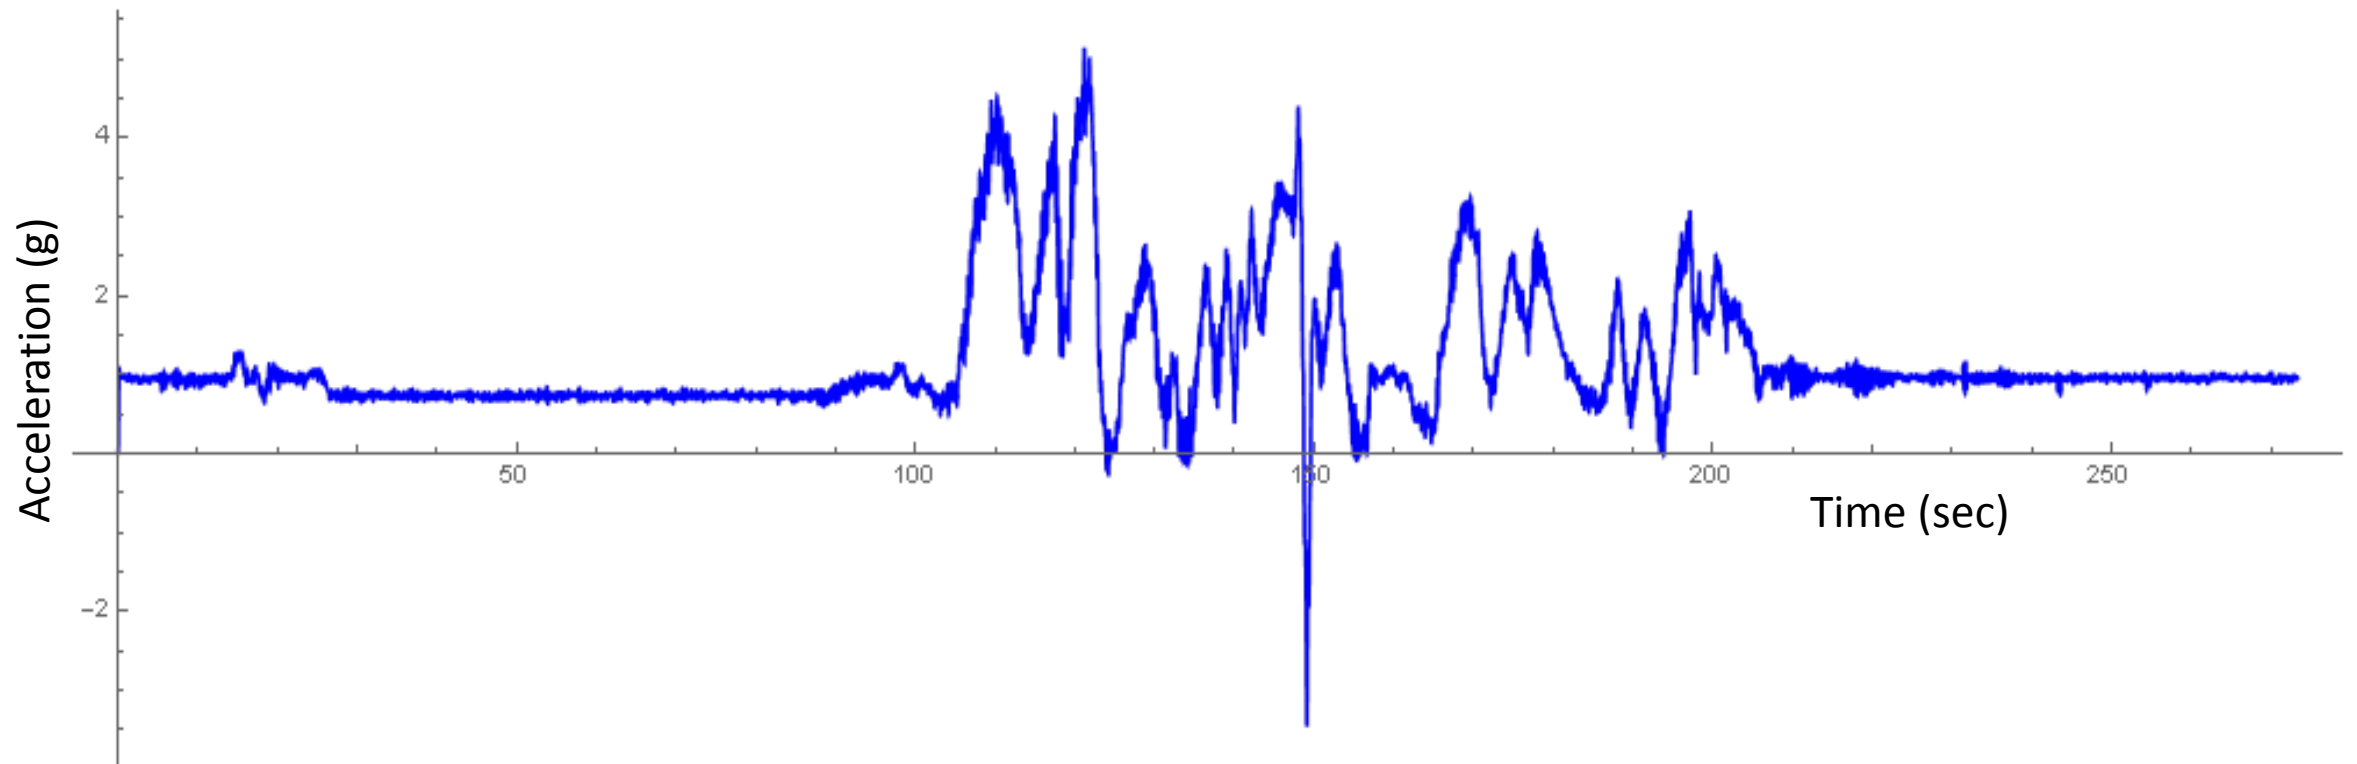


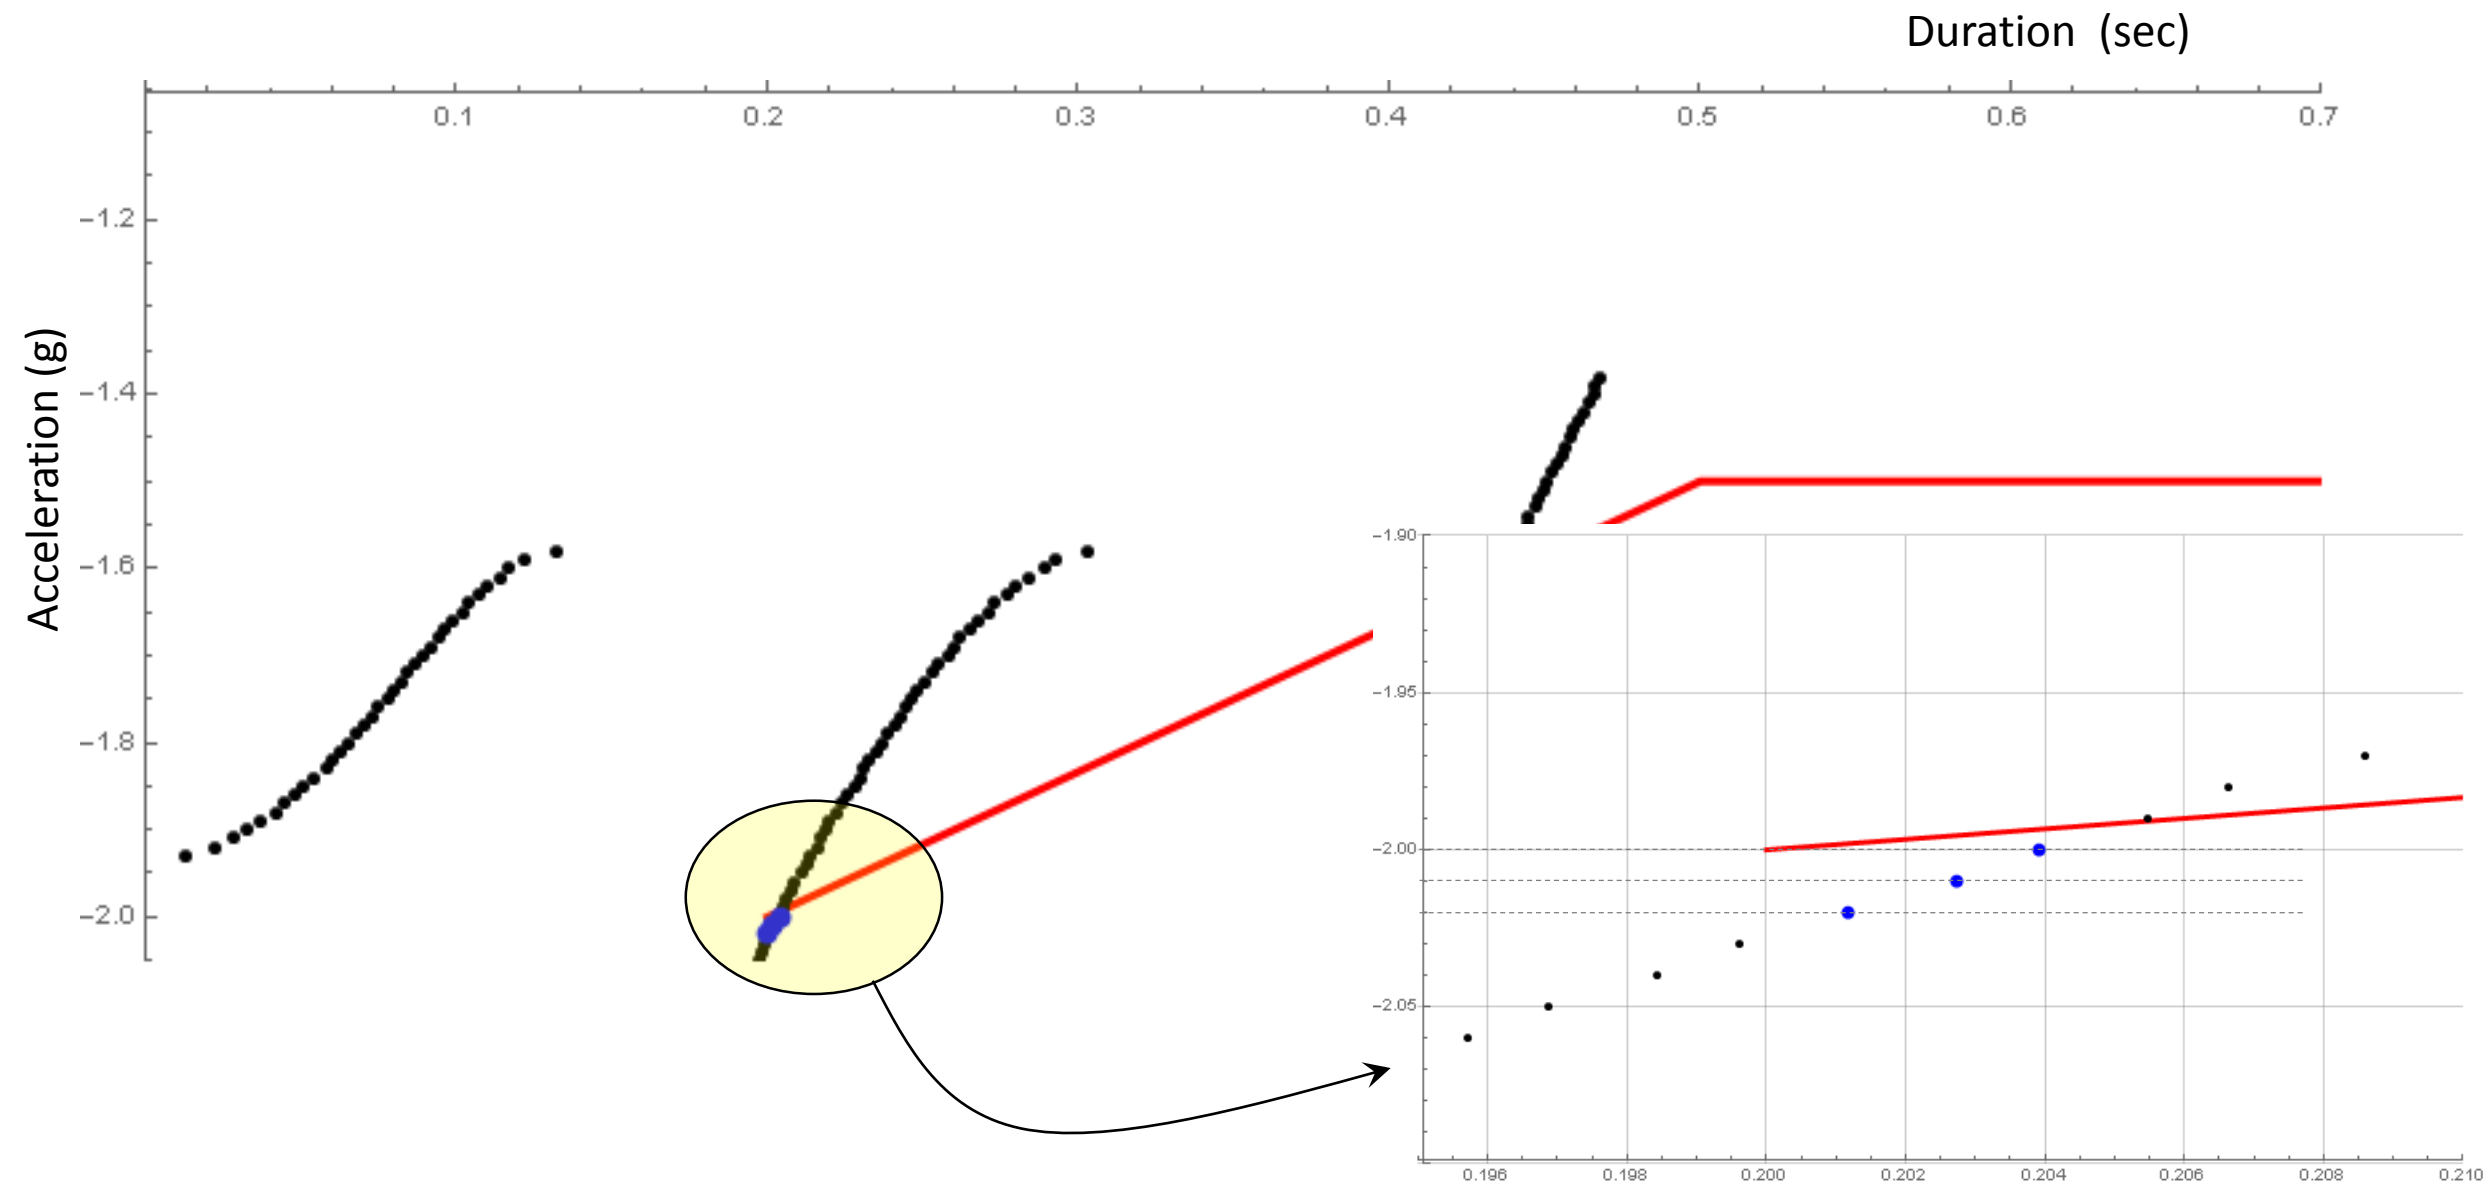

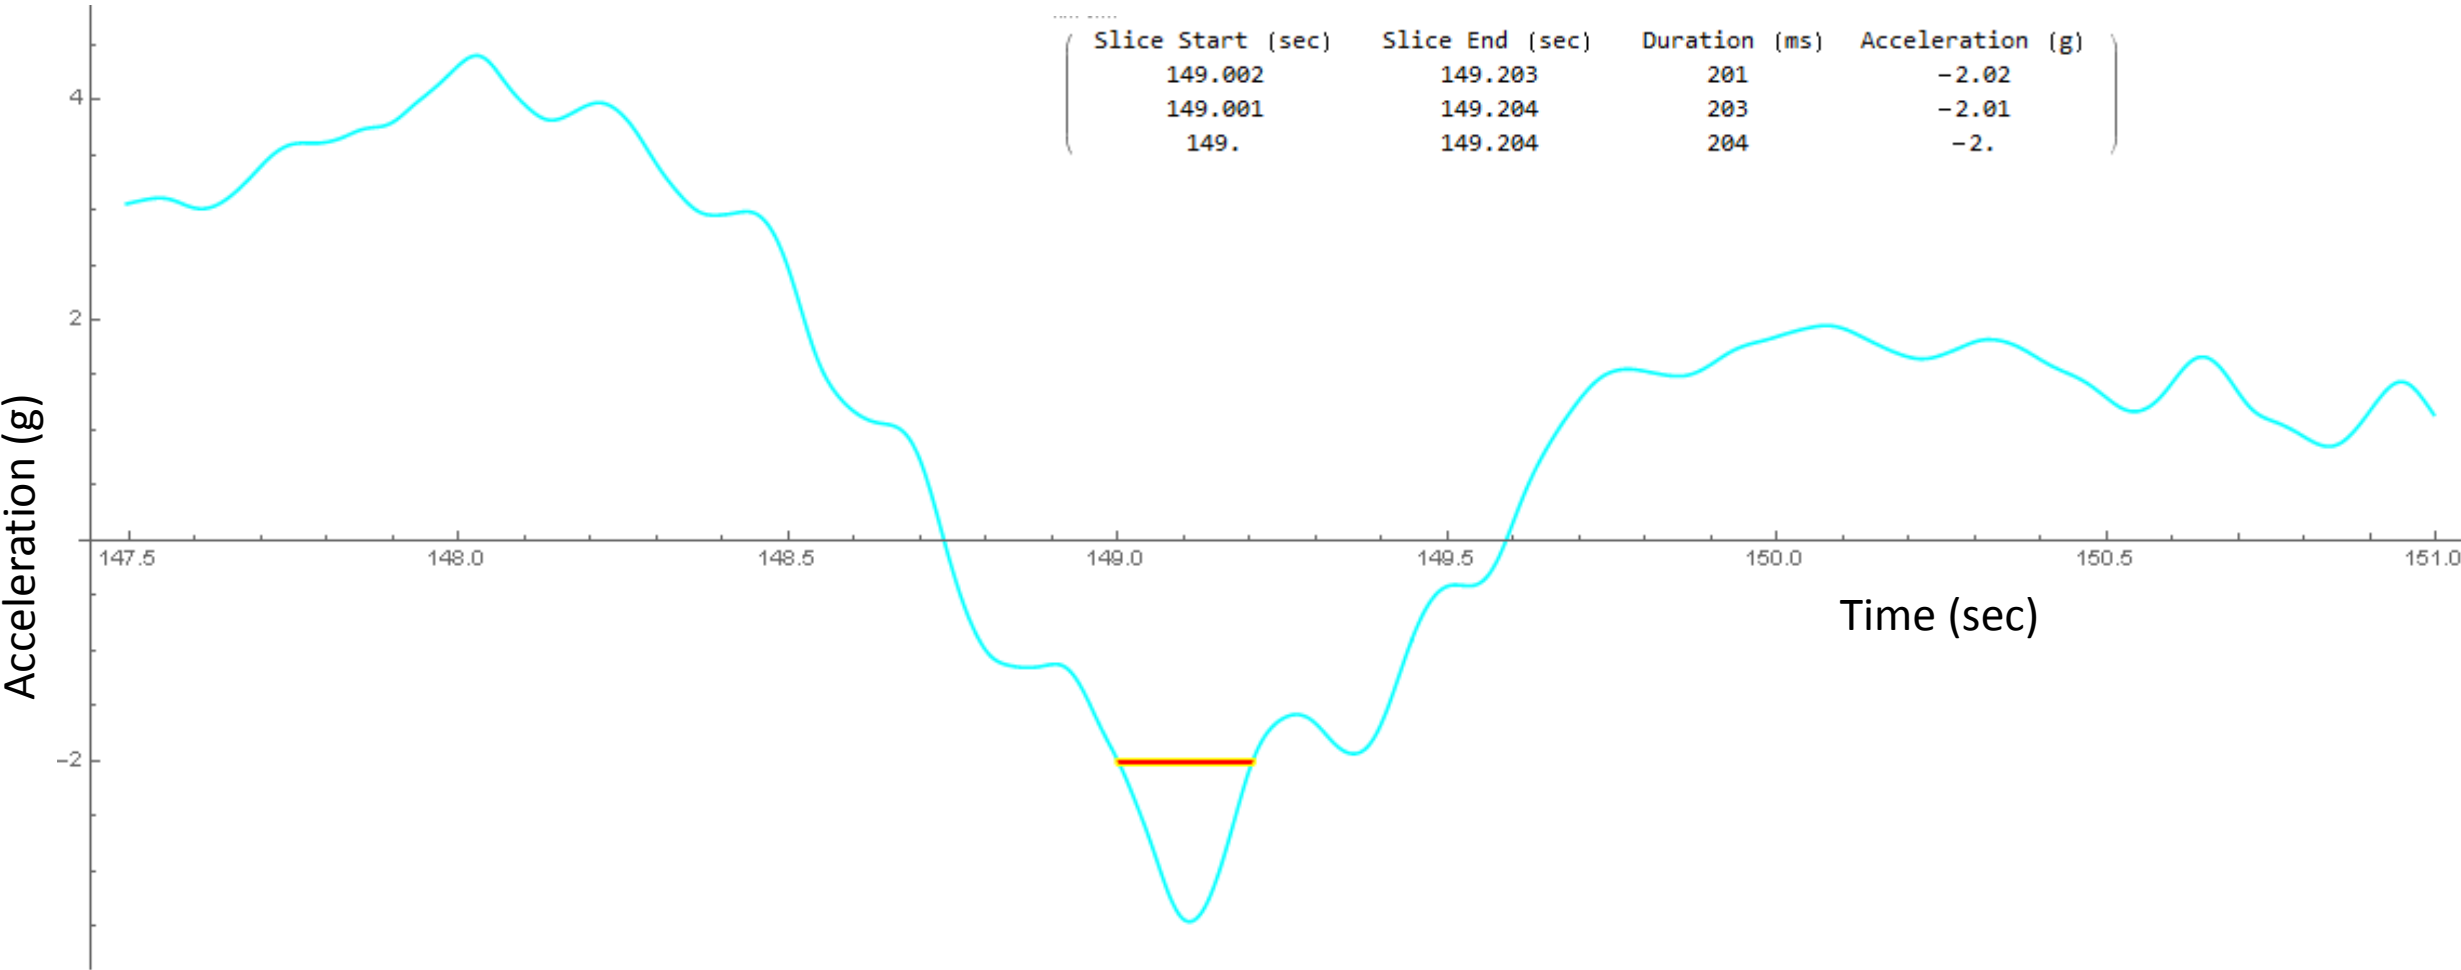

Acceleration-Duration Eyes Up

Slice Start (sec)	Slice End (sec)	Duration (ms)	Acceleration (g)
149.002	149.203	201	-2.02
149.001	149.204	203	-2.01
149.	149.204	204	-2.

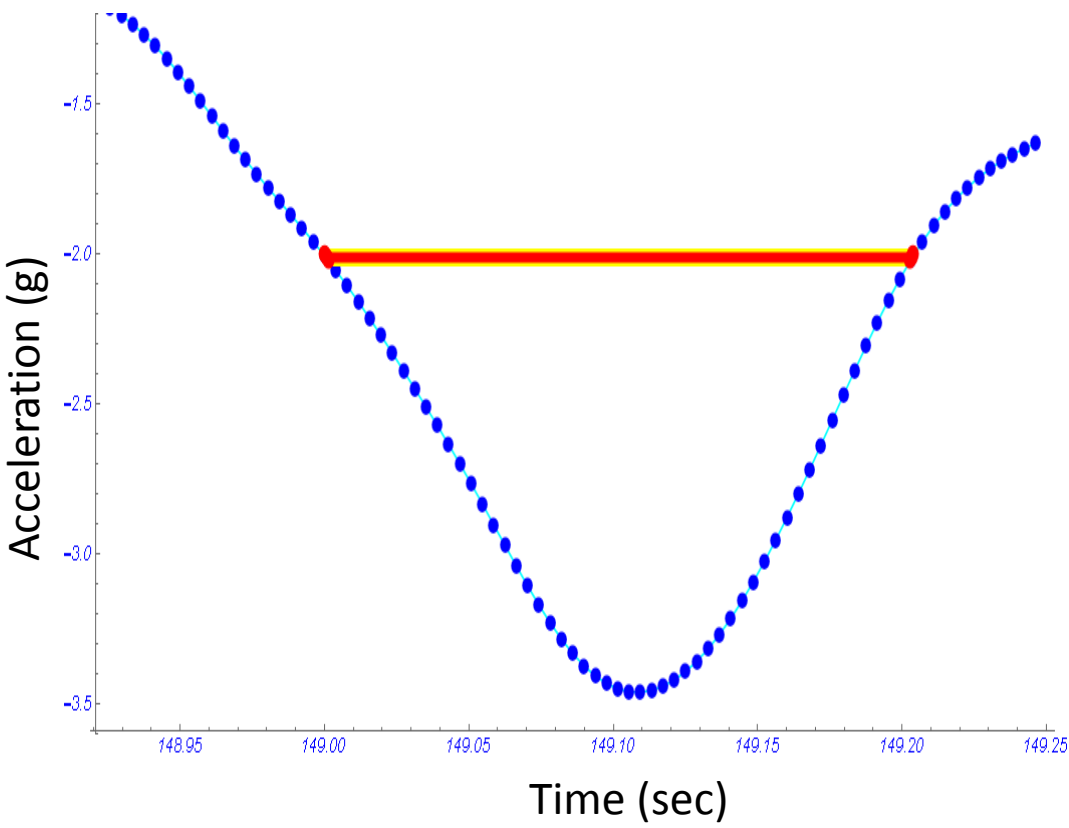

ASTM_AccelDuration_Up_justFails

